

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number
WO 2004/035224 A3

(51) International Patent Classification⁷: B05B 7/24, 9/08

(21) International Application Number:

PCT/GB2003/004370

(22) International Filing Date: 9 October 2003 (09.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

0224052.1	16 October 2002 (16.10.2002)	GB
0303726.4	19 February 2003 (19.02.2003)	GB

(71) Applicant and

(72) Inventor: HARTLEY, Brian [GB/GB]; 12 Oakley Avenue, Brockwell, Chesterfield, Derbyshire S40 4DS (GB).

(74) Agent: PARNHAM, Kevin; Swindell & Pearson, 48 Friar Gate, Derby DE1 1GY (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: A SPRAY DEVICE

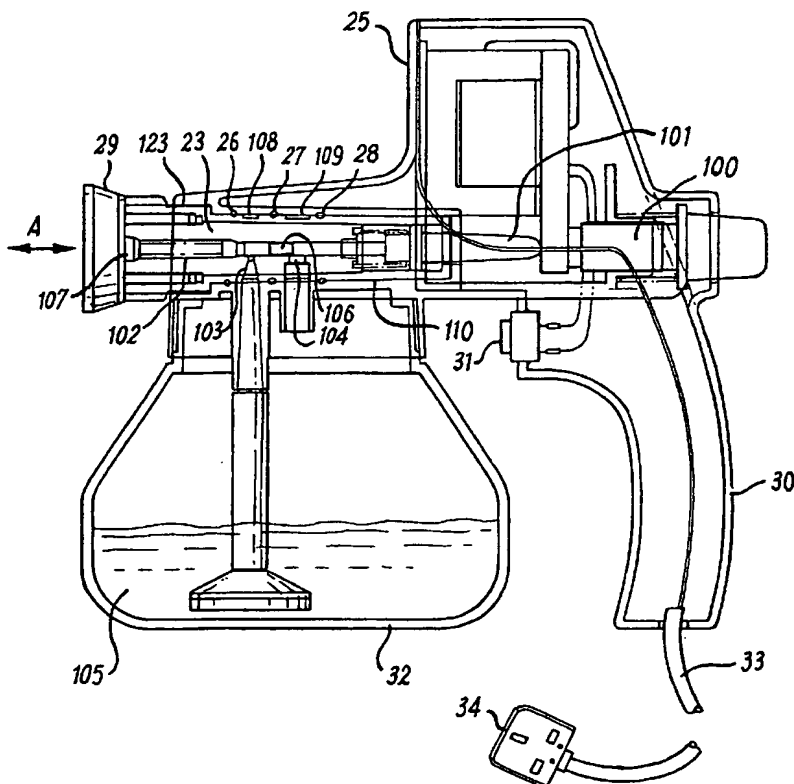

(57) Abstract: A spray device is provided in which a spray stem section (23) is secured within a passage (110) of a spray device body (25). The stem section (23) is readily removable to allow easy cleaning and also is normally made of materials, which allow disposal after use of the stem section (23). In order to allow such use of plastics materials, in particular the stem section (23) is associated with the passage (110) such that seal elements (26, 27, 28) isolate feed ports (103, 104) over a relatively broad communication band to gutter channels (108, 109) in the stem section (23). Normally a nozzle combination (107, 113, 114) is secured within a jet (102) such that this combination is also separately disposable. The nozzle combination (107, 113, 114) is held within the spray stem section (23) using a spray hood (115).